



LS 系列 Series

特点 Features


- 耐高纹波，耐高温，特长寿命，105°C 5000~10000小时。
High Ripple Current High Temperature , extremely Long Life, 105°C 10000 hours.
- RoHS指令已对应完毕。
Adapted to the RoHS directive.



主要技术性能 Specifications

项目 Items	特性 Characteristics																				
使用温度范围 Operating Temperature Range	-25~+105℃																				
额定电压范围 Rated Voltage Range	160~450V																				
标称电容量范围 Nominal Capacitance Range	2.2~330μF																				
标称电容量允许偏差 Capacitance Tolerance	±20% (+20℃, 120Hz)																				
漏电流 Leakage Current	I≤0.02CV +10(μA) 5分钟 20℃ (at 20℃, after 5 minutes)																				
损耗角正切值 (tgδ) Dissipation Factor (+20℃, 120Hz)	<table><tr><td>U_r (V)</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr><tr><td>tgδ</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.24</td><td>0.24</td><td>0.24</td></tr></table>							U _r (V)	160	200	250	350	400	450	tgδ	0.20	0.20	0.20	0.24	0.24	0.24
	U _r (V)	160	200	250	350	400	450														
tgδ	0.20	0.20	0.20	0.24	0.24	0.24															
温度特性 Temperature Characteristic (Impedance ratio at 120Hz)	<table><tr><td>U_r (V)</td><td>160</td><td>200</td><td>250</td><td>400</td><td>420</td><td>450</td></tr><tr><td>Z-25℃ / Z+20℃</td><td>3</td><td>3</td><td>4</td><td>6</td><td>7</td><td>7</td></tr></table>							U _r (V)	160	200	250	400	420	450	Z-25℃ / Z+20℃	3	3	4	6	7	7
	U _r (V)	160	200	250	400	420	450														
Z-25℃ / Z+20℃	3	3	4	6	7	7															
耐久性 Load Life	施加额定工作电压,在105℃ 10000小时试验后,电容器应符合下列要求 After application of the rated voltage at 105℃ 10000 hours, the capacitors shall meet the below requirement 时间 Time : 105℃ 10000 hours 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value																				
高温贮存 Shelf Life	+105℃ 1000小时贮存后, 恢复16小时后 After storage for 1000 hours at +105℃ and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤4倍初始规定值≤4 times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value																				

外形图及尺寸表 Case Size Table

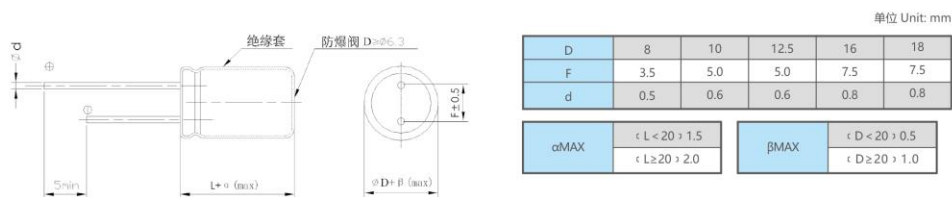

频率修正系数 Frequency Coefficient

Frequency (Hz) CAP(μF)	120	1K	10K	100K
≤100	1.00	1.75	2.25	2.50
> 100	1.00	1.67	2.05	2.25

尺寸 Dimensions

CAP(μF) \ WV		160V(2C)		200V(2D)		250V(2E)	
		Size	Ripple	Size	Ripple	Size	Ripple
4.7	4R7					8×11.5	78
6.8	6R8			8×11.5	89	10×12.5	100
10	100	10×12.5	120	10×12.5	120	10×16	135
22	220	10×16	198	10×20	220	10×20	213
33	330	10×20	270	12.5×20	290	12.5×20	295
47	470	12.5×20	350	12.5×25	355	16×20	405
68	680	12.5×25	460	16×20	480	16×25	535
100	101	16×20	585	16×25	640	16×25	640
150	151	16×25	770	16×35	910	18×25	743
220	221	16×35	950	18×35	1050	18×30	960
330	331	18×35	1220				

CAP(μF) \ WV		350V(2V)		400V(2G)		450V(2W)	
		Size	Ripple	Size	Ripple	Size	Ripple
2.2	2R2	8×11.5	52	8×11.5	53	8×11.5	50
3.3	3R3	8×11.5	63	8×16	72	8×16	70
4.7	4R7	8×16	88	10×12.5	90	10×16	88
6.8	6R8	10×12.5	102	10×16	113	10×20	113
10	100	10×20	150	10×16	134	12.5×20	150
22	220	12.5×20	240	12.5×25	265	12.5×20	225
33	330	12.5×25	325	16×25	370	16×30	370
47	470	16×25	445	16×30	480	16×35	475
68	680	16×30	575	16×25	530	18×30	546
82	820	16×35	650	18×30	635	18×30	585
100	101	18×35	755	18×30	704	18×40	733

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz